



Professional Dryer

PD9C

Features and benefits

- PD9C is a large capacity tumble dryer for professional users
- With Compass Pro program control
 - A control knob for simple program selection and start
 - Large and clear display
 - Time and temperature selection for flexible use
- Anti-crease cycle for avoiding creasing if the dryer is not unloaded
- Low energy consumption for optimal efficiency
- Reversible door hanging for a convenient laundry flow
- Large door opening for easy loading/unloading
- White painted cabinet
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption

Options

- Payment: coinmeter with Ecopower
- Fresh air intake



Images shown are a representation of the product only and variations may occur.

Main specifications		PD9C	
Capacity, max	kg/lb	10.6/23.4	
Heating, electric	kW	6/8	
Consumption data		6kW	8kW
Total time full load	min	47	37
Energy consumption full load	kWh	4.6	4.6
Evaporation	g/min	106	135
Energy kWh/litre water evaporated	kWh	0.92	0.92
At rated capacity 100% cotton load at 50% initial moisture dried to 0%.			


Certified in accordance with ISO 9001 and ISO 14001 and approved IP X4.

Electrical connections

Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-240V 1 ~	50/60	6.0/8.0	6.3/8.3	35/50
	220-230V 3 ~	50/60	6.0/8.0	6.3/8.3	20/25
	240V 3 ~	50/60	6.0/8.0	6.3/8.3	16/25
	380-415V 3 ~	50/60	6.0/8.0	6.3/8.3	10/16
	440/480V 3 ~	60	6.0/8.0	6.3/8.3	10/16

Air connections			PD9C
Air outlet		ø mm	125
Evacuated air	6 kW (el)	m³/h	270
	8 kW (el)		290
Pressure drop	6 kW	Max. Pa	120
	8 kW		70
Sound levels			
Airborne sound level			
L _w		dB(A)	68
Heat emission			
% of installed power, max			15
Shipping data			
net, kg			99
Shipping volume crated, m³			0.83
Dimensions in mm			
A	Width		721
B(a)	Depth		759
B(b)	Depth		684
C	Height		1114
D			404
E			45
F			180
G			88
H			113
1	Operating panel		
2	Door opening ø 400 mm		
3	Electrical connection		
4	Exhaust connection		

Other voltages available, see installation manual.
Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.
Art No. 438919530EN/2015.01.14
We reserve the right to alter specifications without notice.

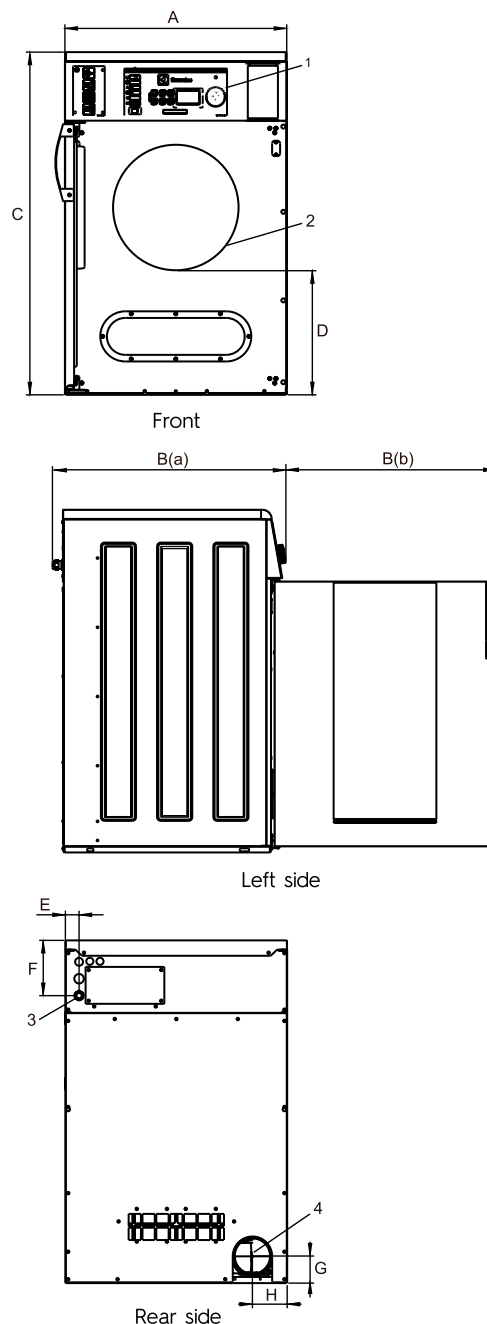

Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au