



Tumble dryer

QuickDry QDC

Features and benefits

- A knob for simple programme selection and start
- Large, clear display
- Time and temperature selection for flexible use
- Residual Moisture Control for an accurate drying result and a low energy consumption
- Reversing drum for less tangling of large items
- Anti-wrinkle function prevents wrinkling of textiles if the dryer is not emptied
- Stainless steel drum
- The door can be switched from left to right mounting
- Powder coated black front panel, side panels and top cover

Main options

- Stacking frame for mounting QuickDry QDC on top of QuickWash QWC
- Stainless plinth for raising the machine to a comfortable height, 290 mm
- QuickDry QDC is available as an evacuation dryer or condensation dryer



Images shown are a representation of the product only and variations may occur.

| Main specifications | | QuickDry QDC | | Condense | |
|---|-------|--------------|---------|-----------|---------|
| Rated capacity, filling factor 1:30 | kg | 4.3 | | 4.3 | |
| Rated capacity, filling factor 1:22 | kg | 6.0 | | 6.0 | |
| Drum volume | litre | 130 | | 130 | |
| Drum diameter | mm | 575 | | 575 | |
| Heating alternatives electric | kW | 5.1 / 2.9 | | 3.0 / 2.7 | |
| Consumption data | | 1:22 | 1:30 | 1:22 | 1:30 |
| Total time full load | min | 37 / 64 | 27 / 47 | 69 / 76 | 50 / 55 |
| Energy consumption, full load | kWh | 3.1 | 2.3 | 3.5 | 3.0 |
| Evaporation | g/min | 81 / 46 | 81 / 46 | 43 / 39 | 43 / 39 |
| At rated capacity 100% cotton load at 50% initial moisture dried to 0%. | | | | | |

Certified in accordance with ISO 9001 and ISO 14001 and approved IP X4.

Electrical connections

| Heating alternative | Main voltage | Hz | Heating power kW | Total power kW | Recommended fuse A |
|------------------------------|---------------|-------|------------------|----------------|--------------------|
| Electric heated QuickDry QDC | 220-230V 1 ~ | 50/60 | 3.1 | 3.3 | 16 |
| | 240V 1 ~ | 50/60 | 2.9 | 3.1 | 13 |
| | 240V 1 ~ | 50/60 | 3.2 | 3.5 | 16 |
| | 220-230V 3 ~ | 50/60 | 3.1 | 3.3 | 16 |
| | 380-400V 3 ~ | 50/60 | 4.9 | 5.1 | 10 |
| | 380-400V 3N ~ | 50/60 | 4.9 | 5.1 | 10 |
| Condense | 240V 1 ~ | 50/60 | 2.7 | 3.1 | 13 |
| | 380-400V 3N ~ | 50/60 | 3.0 | 3.3 | 10 |


| Connections | | QuickDry QDC | Condense |
|---|---------------|--------------|------------|
| Air outlet | mm | ø 100 | - |
| Evacuated air, el (5.1 kW) | m³/h | 260 | - |
| Evacuated air, el (2.9 kW) | m³/h | 200 | - |
| Condensate | | - | 1/2" |
| Pressure drop | Max. Pa | 50 | - |
| Sound levels | | | |
| Airborne sound level | dB(A) | <70 | <70 |
| Heat emission | | | |
| % of installed power, max | | 15 | |
| Shipping data | | | |
| Shipping volume | net, kg m³ | 58 0.51 | 57 0.63 |
| Accessories | | | |
| Stacking frame for mounting QuickDry QDC on top of QuickWash QWC | | x | x |
| Stainless steel base frame 290 mm | | x | x |
| Dimensions in mm | | | |
| A Width | | 597 | 597 |
| B Depth | | 725 | 725 |
| C Height | | 839 | 839 |
| D | | 138 | 138 |
| E | | 50 | 50 |
| F | | 89 | 89 |
| G | | 200 | 200 |
| 1 Operating panel 2 Door opening ø 370 mm 3 Electrical connection 4 Exhaust connection 5 Condense connection | | | |

Other voltages available, see installation manual.


Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.

Ventilation QuickDry with condensation unit


The energy used to dry your washing ends up in the room in the form of heat. This is why the room becomes too hot and requires ventilation when the tumble dryer is used. An air change rate of 400 m³/h is required with an outdoor temperature of 0 °C and a desired room temperature of 20-25 °C. A thermostat-controlled fan - part No. 9888020-43 - is available as an optional extra. The fan and fresh air intake are positioned as shown in the illustration. The advantage of condensation dryers is that you do not have to evacuate fluff gathered and moist air.

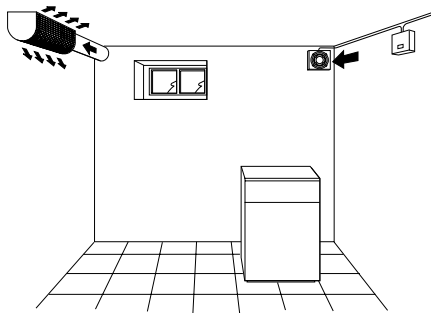


Electrolux

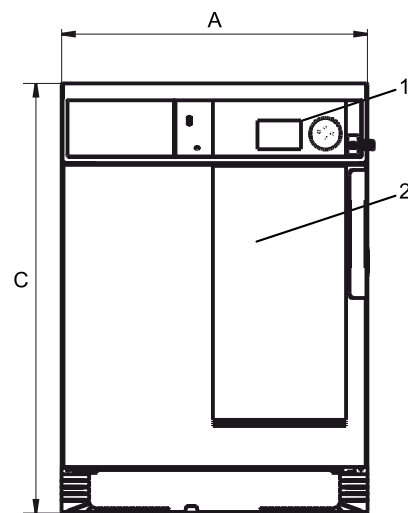

Front

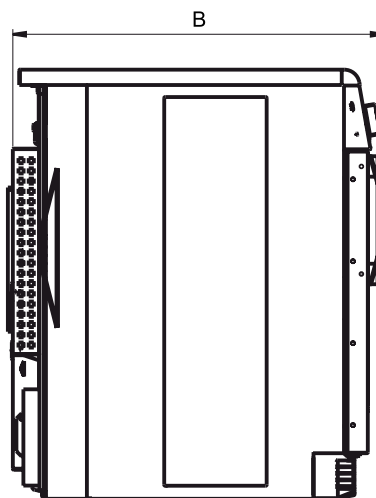

Left side

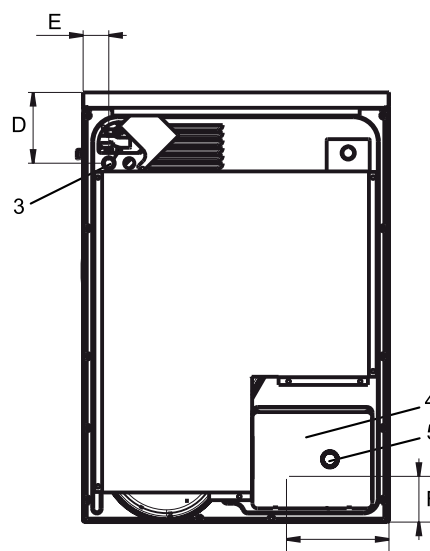

Rear side

Art No. 438919466EN/20150114

We reserve the right to alter specifications without notice.



Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au