



Tumble dryer T5190

Features and benefits

- **Compass Pro® microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Quick selection and option buttons for the most frequently used drying programs and options
 - Drying program packages optimized for Economy, Care and Time and option buttons for selection of dryness
 - Service program for adjustment of parameters
 - USB connection
- High productivity – 2 full loads per hour
- Low energy consumption for optimal efficiency
- Reversible door hanging for a convenient laundry flow
- Easy access to vital parts from front and rear for simple servicing
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption
- Residual Moisture Control for an accurate drying result and a low energy consumption
- Reversing drum for less tangling of large items



Images shown are a representation of the product only and variations may occur.

Main options

- Stainless steel front
- Stainless steel drum
- Payment: coinmeter with Ecopower, chipcard reader, CP connection
- Stainless steel base frame
- Separate condense system
- Fresh air intake

Main specifications		T5190			
Rated capacity, filling factor 1:18 filling factor 1:22	kg/lb	10.6/23			
	kg/lb	8.6/19			
Drum volume	litre	190			
Drum diameter	mm	680			
Heating, electric gas	kW	6/8			
	BTU/h (kW)	20500/27300 (6/8)			
Consumption data		6 kW	8 kW	Gas 6 kW	Gas 8 kW
Total time full load	min	35	27	36	29
Energy consumption full load	kWh	3.45	3.53	3.67	3.74
Evaporation	g/min	102	129	106	131
Energy kWh/litre water evaporated	kWh/l	0.92	0.94	-	-

At rated capacity 100% cotton load at 50% initial moisture dried to 0%.


Certified in accordance with ISO 9001 and ISO 14001 and approved IP X4.

Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-240V 1 ~	50/60	6.0/8.0	6.3/8.3	35/50
	220-230V 3 ~	50/60	6.0/8.0	6.3/8.3	20/25
	240V 3 ~	50/60	6.0/8.0	6.3/8.3	16/25
	380-415V 3 ~	50/60	6.0/8.0	6.3/8.3	10/16
	440/480V 3 ~	60	6.0/8.0	6.3/8.3	10/16
Gas heated	220-480V 1/3 ~	50/60	-	0.3	10



Gas and air connections			T5190
Gas		ISO 7/1-R	1/2"
Gas pressure	Natural gas	Pa	2000
		mbar	20
	Propane	Pa	2800-5000
		mbar	30
Air outlet		ø mm	125
Evacuated air	6 kW	m³/h	270
	8 kW		290
Pressure drop	6 kW	Max. Pa	380
	8 kW		350
Sound levels			
Airborne sound level		dB(A)	68
Heat emission			
% of installed power, max			15
Shipping data			
Weight		net, kg	99
Shipping volume		m³	0.83
Dimensions in mm			
A	Width		721
B(a)	Depth (Gas)		778
B(b)	Depth (El)		759
B(c)	Depth		684
C	Height		1114
D			404
E			45
F			180
G			88
H			113
I			79
J			561
1 Operating panel 2 Door opening ø 400 mm 3 Electrical connection 4 Gas connection 5 Exhaust connection			

Other voltages available, see installation manual.
Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.
Art. No. 438919515EN/2015.01.14
We reserve the right to alter specifications without notice.

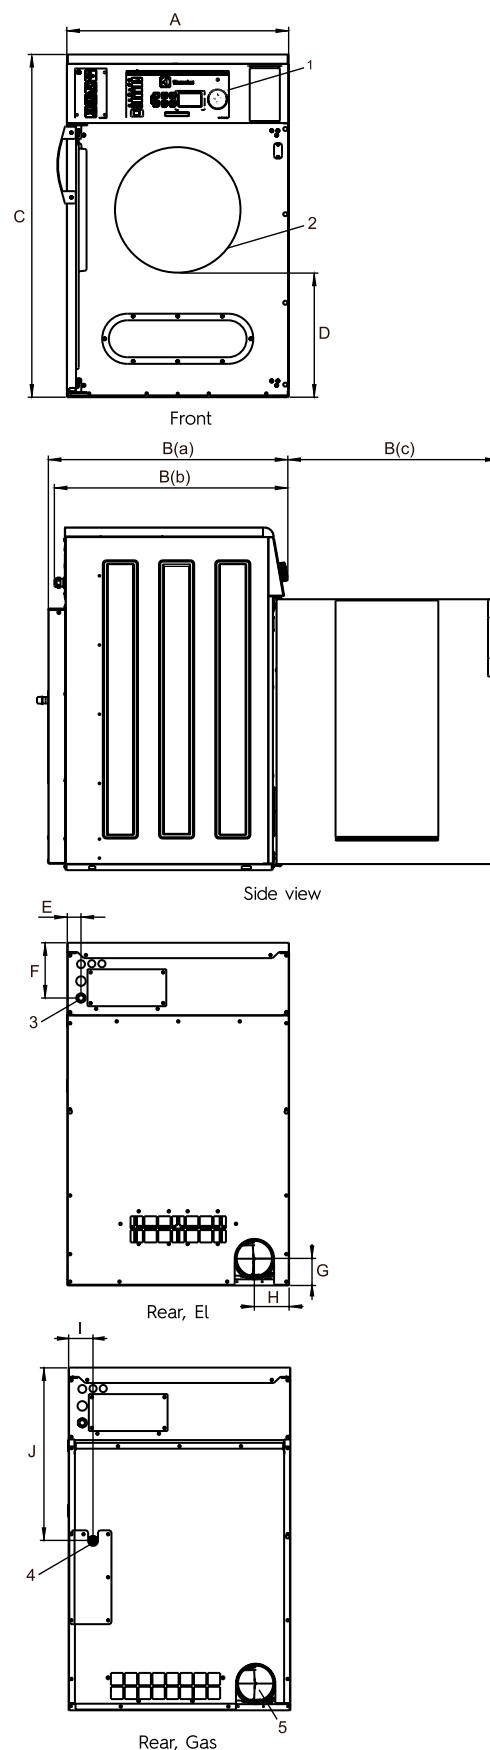

Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au