



# Tumble dryer

## T5550

### Features and benefits

- Axial airflow and tight construction gives low energy consumption
- High productivity - 2 full loads per hour
- Large door opening for easy loading and unloading
- Easy and ergonomic access to the lint screen
- Excellent water evaporation efficiency per kWh
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption
- With Compass Pro program control
  - Large and clear display with control knob for easy program selection
  - Easy access with user-friendly interface
  - Language selection
  - Drying program packages optimized for Economy, Care and Time
  - Service program for adjustment of parameters
  - USB connection

### Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control - RMC
- Connection to booking- /payment- system or coin meter
- Reversing drum
- Emergency stop button
- Supply disconnecter

### Accessories

- Fresh air intake
- Exhaust on top  
(Top evacuation is not available on steam heated tumble dryers)
- Insert for drying special equipment




Images shown are a representation of the product only and variations may occur.


Main specifications			T5550			
Rated capacity,	filling factor 1:18	kg/lb	30.5/67.2			
	filling factor 1:22	kg/lb	25/55.1			
Drum volume		litre	550			
Drum diameter		mm	913			
Heating alternatives						
	electric	kW	24/32			
	gas	BTU/h (kW)	11 2700 (33)			
	steam at 600-700 kPa	kW	36			
Consumption data			24 kW	32 kW	Gas	Steam
Total time at 25 kg		min	31	23	24	23
Energy consumption at 25 kg		kWh	12.29	12.19	13.27	15.24
Evaporation		g/min	409	543	512	550
Energy kWh/litre water evaporated		kWh/l	0.98	0.98	1.06	1.22

At rated capacity 100% cotton load at 50% initial moisture dried to 0%.


Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-240V 1 ~	50/60	24.0	26.2	125
	220-240V 3 ~	50/60	24.0/32.0	26.3/34.3	80/100
	380-415V 3 ~	50/60	24.0/32.0	26.7/34.7	50/50
Gas heated/ Steam heated	220-240V 1 ~	50/60	-	1.9	10
	220-240V 3 ~	50/60	-	2.4	10
	380-415V 3 ~	50/60	-	2.6	10

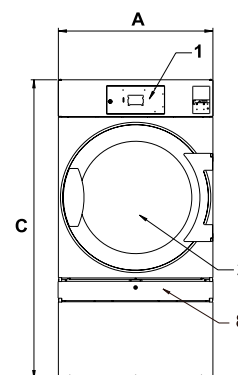

Front

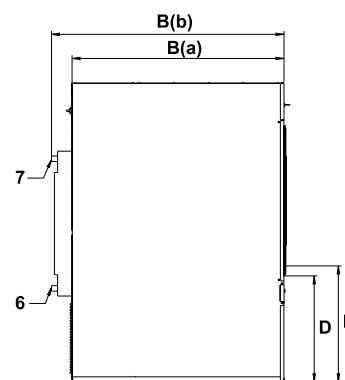

Left side

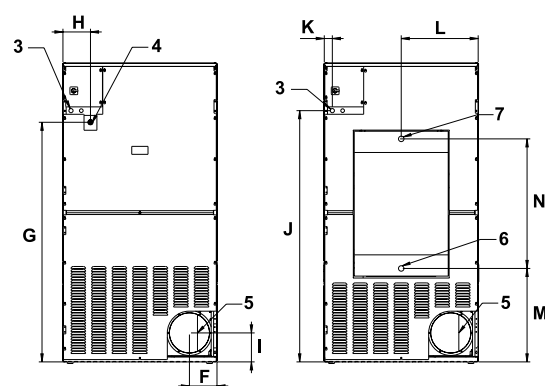

El, gas

Steam

Rear side

Steam, gas and air connections			T5550
Steam	ISO 7/1-R		1"
Steam pressure		kPa	100-1000
Steam consumption		kg/h	65
Condensate	ISO 7/1-R		1"
Gas	NG/PG	ISO 7/1-R	1/2"
Gas pressure	Natural gas	Pa	2000
		mbar	20
	Propane	Pa	2800-3700
		mbar	28-37
Air outlet		ø mm	200
Maximum air flow:			
	Electric 50 Hz / 60 Hz	m³/h	940 / 940
	Gas 50 Hz / 60 Hz	m³/h	940 / 940
	Steam 50 Hz / 60 Hz	m³/h	1080 / 1080
Maximum static back pressure:			
	Electric 50 Hz / 60 Hz	Pa	480 / 950
	Gas 50 Hz / 60 Hz	Pa	420 / 900
	Steam 50 Hz / 60 Hz	Pa	1300 / 1550
Sound levels			
Airborne sound level		dB(A)	<70
Heat emission			
% of installed power, max			15
Shipping data			
Shipping volume	net, kg		280
	crated, m³		2.80
Dimensions in mm			
A	Width		961
B(a)	Depth		1365
B(b)	Depth		1445
C	Height		1869
D			660
E			720
F			170
G			1490
H			200
I			180
J			1560
K			50
L			480
M			580
N			805
<b>1</b> Control panel <b>2</b> Door opening ø 810 mm <b>3</b> Electrical connection <b>4</b> Gas connection <b>5</b> Exhaust connection <b>6</b> Condensate connection <b>7</b> Steam connection <b>8</b> Lint screen			

Other voltages available, see installation manual.

Average data. Crated weight/shipping volume depends on configuration.

Please contact logistics for exact measures.

Art No. 438913781/2015.03.20

We reserve the right to alter specifications without notice.



**Electrolux**  
**Authorized**  
**Partner**



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164  
 Ph : (08) 9414 9474 Fax : (08) 6210 5961  
 Service : 0411 883 346 / 0400 246 352  
 Sales : 0406 659 429/ [sales@comls.com.au](mailto:sales@comls.com.au)  
 Web site : [www.comls.com.au](http://www.comls.com.au)