



Washer extractors

W4130H, W4180H, W4240H

Features and benefits

- **Clarus Control®** with:
 - Fully programmable microprocessor
 - All relevant wash parameters can be programmed
 - Programming from key pad or downloading via memory card
- High extraction force for efficient dewatering
- Extremely low water and energy consumption – see table below
- Four compartment soap box for manual dosing of powder or liquid detergent
- Stainless steel front panel and grey side panels
- Large door opening for easy loading/unloading
- Low noise level, for pleasant working environment
- SuperBalance™ guarantees the correct extraction force

Main options

- IS – Integrated Saving
- Stainless steel side panel
- Dual drain valves for water re-use
- Dynamic Balancing System™ eliminates noise and vibration (not W4240H)




Images shown are a representation of the product only and variations may occur.


Main specifications				W4130H		W4180H		W4240H	
Max. capacity	kg/lb			14/30		20/45		27/60	
Drum, volume	litre			130		180		240	
diameter	ø mm			650		725		795	
Extraction	rpm			980		930		890	
G-factor				350		350		350	
Heating alternatives, 230/400V	electricity	kW		12.5		17.5		19.4	
	steam			x		x		x	
	non-heated			x		x		x	
Consumption data "Normal 60°C" (3G01)				El	Steam	El	Steam	El	Steam
Total time	min			47		45		46	
Water consumption (cold+hot)	litre			86+22	86+22	120+32	120+32	167+42	167+42
Energy consumption (motor/heating)	kWh			0.3/0.55	0.3	0.5/0.8	0.5	0.55/1.05	0.6
Steam consumption	kg			-	0.8	-	1.2	-	1.6
Water temperature 15°C cold water and 65°C hot water. Depending on steam pressure.									

Electrical connections			W4130H	W4180H	W4240H
Heating El.	Voltage				
	230V 3 AC 50 Hz	kW(A)	12.5(35)	17.5(50)	19.4(63)
	240V 3AC 60 Hz	kW(A)	12.5(35)	17.5(50)	20.9(63)
	400V 3N AC 50 Hz	kW(A)	12.5(20)	17.5(35)	19.4(35)
Steam or non-heated	230V 1AC 60 Hz	kW(A)	1.6(10)	2.3(16)	2.6(16)
	240V 1AC 60 Hz	kW(A)	1.6(10)	2.3(16)	2.6(16)
	230V 1AC 50 Hz	kW(A)	1.6(10)	2.3(16)	2.6(16)
Water and steam connection					
Water valves	DN		20	20	20
Water pressure	kPa		150-400	150-400	150-400
Capacity at 300 kPa	l/min		20	60	60
Drain valve	ø mm		75	75	75
Draining capacity	l/min		170	170	170
Steam valve	DN		15	15	15
Steam pressure	kPa		300-600	300-600	300-600
Liquid detergent supplies			5	5	5
Floor requirements					
Frequency of the dynamic force	Hz		16.3	15.5	14.8
Floor load at max extraction	kN		3.1 ± 0.5	4.2 ± 1.0	5.2 ± 1.0
Sound levels					
Sound pressure level	dB(A)		70	75	78
Sound power level (IEC 60704-2-4)					
wash	dB(A)		65	68	67
extraction	dB(A)		78	83	85
Heat emission					
% of installed power, max			5	5	5
Shipping data					
Weight	net, kg		267	356	400
	crated, kg		284	376	448
Shipping volume	m ³		1.27	1.64	1.79
Accessories					
Steel base frame			x	x	x
Water re-use tank (Clarus Control)			x	x	x
Hose kits for water or steam			x	x	x
Fluff collector			x	-	-
Dimensions in mm					
A Width			910	970	1020
B Depth			785	870	915
C Height			1325	1410	1445
D			435	470	500
E			825	945	955
F			1035	1120	1155
G			125	115	100
H			1245	1330	1360
I			215	230	215
K			1225	1290	1320
L			300	315	300
M			-	395	380
N			100	100	100
O			305	335	360
P			455	485	510
1 Electrical connections	6 Liquid supply connections				
2 Cold water	7 Control panel				
3 Hot water	8 Soap box				
4 Steam connection	9 Door opening ø395 (W4130H), ø435 (W4180H,W4240H)				
5 Drain					


Other voltages available, see installation manual.
 Approx. value at operators position in a mid-size laundry room.
 Art. No. 438919521EN/2015.01.14
 We reserve the right to alter specifications without notice.

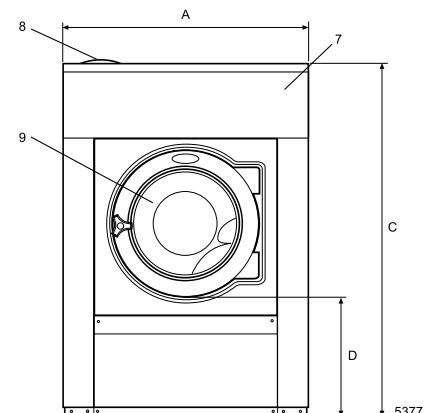

Front

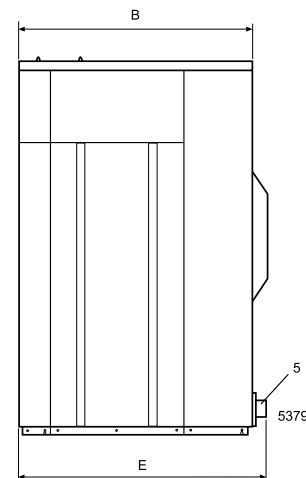

Right side

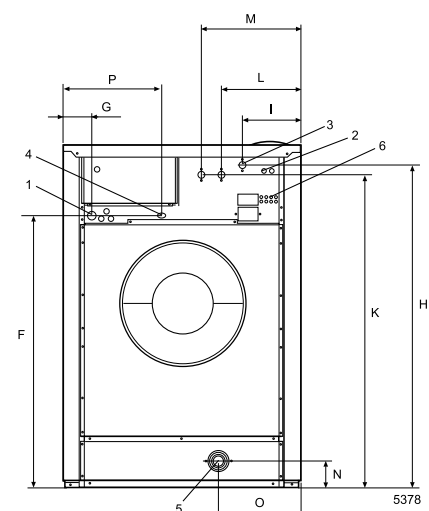

Rear side



Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
 Ph : (08) 9414 9474 Fax : (08) 6210 5961
 Service : 0411 883 346 / 0400 246 352
 Sales : 0406 659 429/ sales@comls.com.au
 Web site : www.comls.com.au