



Washer extractors

W4280X, W4350X, W4600X

Features and benefits

- **Clarus Control[®]** with:
 - Fully programmable microprocessor
 - All relevant wash parameters can be programmed
 - Programming from key pad or downloading via memory card
- Large door opening for easy loading/unloading
- Super Balance, software ensure a quick distribution/extraction cycle with low noise/vibration level
- Frequency controlled motor
- Prepared for manual or automatic detergent supply
- Stainless steel in all vital parts for high degree of rust protection
- Stainless steel front panels and powder painted side panels
- Non-heated or direct steam heating
- Electrical heating (only W4350X, W4600X)

Main options

- Stainless steel panels
- Coin-meter (only W4280X, W4350X)
- Five compartment supply injector (only W4600X)
- Third water inlet valve (only W4600X)




Images shown are a representation of the product only and variations may occur.


Main specifications				W4280X		W4350X		W4600X	
Rated capacity, filling factor 1:10	kg/lb			28/62		35/77		60/135	
Drum, volume	litre			280		350		600	
	diameter		ø mm	830		920		980	
Extraction max			rpm	805		650		630	
G-factor				300		220		220	
Heating alternatives, 230/400V		electricity	kW	-		25		40.8	
		steam		x		x		x	
		non-heated		x		x		x	
Consumption data "Normal 60°C" 1:10				Steam		El		Steam	
Total time	min					49		45	
Water consumption (cold/hot)	litre			308/-		313/62		598/105	
Energy consumption (motor/heating)	kWh			0.35/-		0.5/2.4		2.1/5.4	
Steam consumption	kg			7.3		-		-	
Water temperature 15°C cold water and 65°C hot water. Depending on steam pressure.									

Electrical connections			W4280X	W4350X	W4600X
Heating	Voltage				
EL.	230V 3AC 50/60Hz	kW(A)	-	25(63)	40.3(80)
	400-415V 3N AC 50Hz	kW(A)	-	25(50)	40.8(63)
Steam or non-heated	208-240V 1AC 50/60Hz	kW(A)	1.5(16)	2.5(16)	-
	230V 3AC 50/60Hz	kW(A)	-	-	2.1(10)
	400-415V 3AC 50Hz	kW(A)	-	-	2.8(10)
Water and steam connection					
Water valves	DN/inch		20/ 3/4	20/ 3/4	25/1
Rec. water pressure	kPa		200-600	200-600	200-600
Capacity at 300 kPa	l/min		60	60	110
Drain valve	ø mm/inch		75/3	75/3	75/3
Steam valve	DN/inch		15/ 1/2	15/ 1/2	20/ 3/4
Rec. steam pressure	kPa		300-600	300-600	300-600
Floor requirements					
Frequency of the dynamic force	Hz		13.4	10.8	10.5
Floor load at max extraction	kN		4.9 ± 9.5	6.9 ± 10.7	10.0 ± 15.6
Sound levels					
Sound power level (IEC 60704-2-4)					
wash	dB(A)		69	65	70
extraction	dB(A)		75	82	84
Heat emission					
% of installed power, max			5	5	5
Shipping data					
Weight	net, kg		380	560	775
Dimensions					
A	Width		935	1085	1145
B	Depth		970	1105	1185
C	Height		1455	1570	1670
D			515	530	600
E			120	120	120
F			400	525	800
G			55	55	65
H			1365	1465	1585
I			230	185	305
K			1325	1445	1540
L			315	315	75
M			395	395	215
N			120	120	105
O			170	190	570
P			-	-	1390
R			-	-	50
1	Control panel	6	Cold or hot water (optional for W4600X)		
2	Soap box (only W4280X, W4350X)	7	Steam connection		
2A	Soap box (only W4600X)	8	Drain		
3	Door opening ø410 (W4280X), ø535 (W4350X, W4600X)	9	Electrical connection		
4	Cold water	10	Liquid detergent supply		
5	Hot water	11	Water reuse		


Other voltages available, see installation manual.

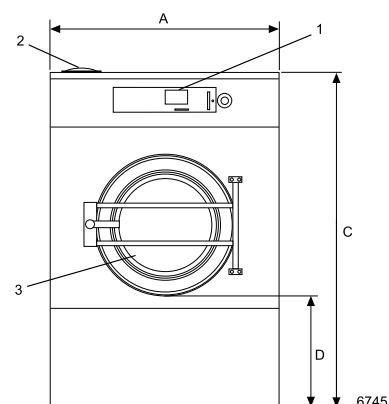


Front W4280X, W4350X

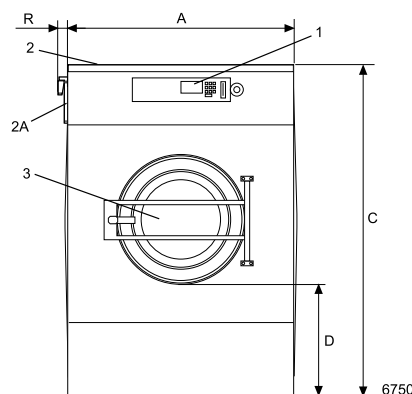


Front W4600X

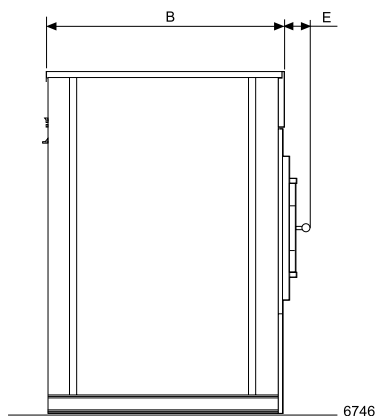


Left side W4280X, W4350X

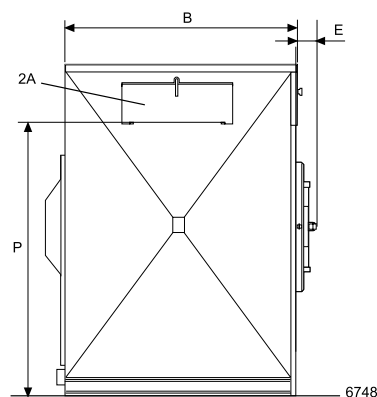

Left side W4600X

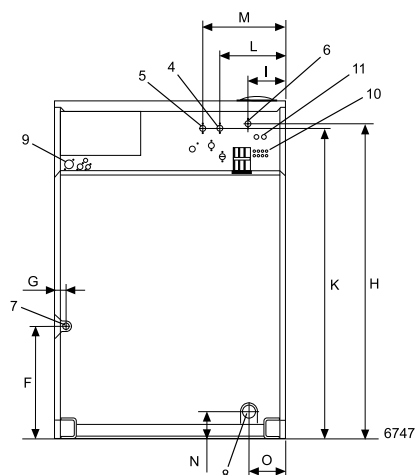

Rear side W4280X, W4350X

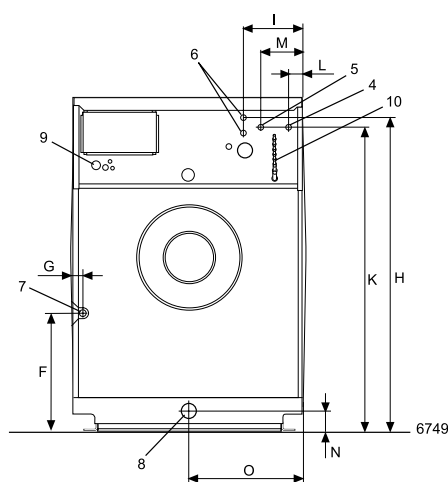

Rear side W4600X



Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au