



Washer extractors

W465H, W475H, W4105H

Features and benefits

- **Clarus Control®** with:
 - Fully programmable microprocessor
 - All relevant wash parameters can be programmed
 - Programming from key pad or downloading via memory card
- High extraction force for efficient dewatering
- Extremely low water and energy consumption – see table below
- Four compartment soap box for manual dosing of powder or liquid detergent
- Large door opening for easy loading/unloading
- Low noise level for pleasant working environment
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance™ guarantees the correct extraction force






Images shown are a representation of the product only and variations may occur.

Main options

- Stainless steel front panel
- Stainless steel side panel
- Drain pump

Main specifications				W465H		W475H		W4105H	
Max. capacity	kg/lb			7/15		8/18		11/25	
Drum, volume	litre			65		75		105	
diameter	ø mm			520		520		595	
Extraction	rpm			1100		1100		1025	
G-factor				350		350		350	
Heating alternatives, 230/400V	electricity	kW		2 / 3 / 5.4 / 7.4 / 5.2		2 / 3 / 5.4 / 7.4 / 5.2		7.4 / 9.7 / 5.2	
	steam			x		x		x	
	non-heated			x		x		x	
Consumption data "Normal 60°C" (3G01)				El	Steam	El	Steam	El	Steam
Total time	min			45		45		46	
Water consumption (cold+hot)	litre			43+11	43+11	49+13	49+13	68+18	68+18
Energy consumption (motor/heating)	kWh			0.15/0.3	0.15	0.2/0.3	0.2	0.25/0.45	0.25
Steam consumption	kg			-	0.5	-	0.45	-	0.7
Water temperature 15°C cold water and 65°C hot water Depending on steam pressure									

Electrical connections			W465H	W475H	W4105H
Heating	Voltage				
El.	230V 1AC 50 Hz	kW(A)	7.3 (35)	7.4 (35)	9.7 (50)
	230V 3AC 50 Hz	kW(A)	7.3 (20)	7.4 (25)	9.7 (35)
	240V 3AC 60 Hz	kW(A)	7.3 (20)	7.4 (25)	9.7 (35)
	240V 1AC 60 Hz	kW(A)	5.6 (25)	5.6 (25)	5.6 (25)
	400V 3N AC 50 Hz	kW(A)	7.4 (16)	7.4 (16)	9.7 (16)
Steam or non-heated	230V 1AC 60 Hz	kW(A)	1.0 (10)	1.1 (10)	1.3 (10)
	240V 1AC 60 Hz	kW(A)	1.0 (10)	1.1 (10)	1.3 (10)
non-heated	230V 1AC 50 Hz	kW(A)	1.0 (10)	1.1 (10)	1.3 (10)
Water and steam connection					
Water valves	DN		20	20	20
Water pressure	kPa		200-600	200-600	200-600
Capacity at 300 kPa	l/min		20	20	20
Drain valve	ømm		50/75	50/75	50/75
Draining capacity	l/min		170	170	170
Steam valve	DN		15	15	15
Steam pressure	kPa		300-600	300-600	300-600
Liquid detergent supplies			5	5	5
Floor requirements					
Frequency of the dynamic force	Hz		18.3	18.3	17.1
Floor load at max extraction	kN		1.8 ± 0.5	1.9 ± 0.5	2.5 ± 0.5
Sound levels					
Sound pressure level	dB(A)		64	65	69
Sound power level (IEC 60704-2-4)					
wash	dB(A)		60	61	62
extraction	dB(A)		76	76	77
Heat emission					
% of installed power, max			5	5	5
Shipping data					
Weight	net, kg		154	159	201
	crated, kg		167	179	225
Shipping volume	m ³		0.75	0.75	0.99
Accessories					
Steel base			x	x	x
Hose kits for water or steam			x	x	x
Fluff collector			x	x	x
Dimensions in mm					
A Width			720	720	830
B Depth			690	690	705
C Height			1115	1115	1200
D			355	355	365
E			720	720	740
F			825	825	910
G			45	45	45
H			1030	1030	1115
I			220	220	220
K			1010	1010	1100
L			135	135	135
M			830	830	910
N			360	360	415
O			100	100	100
P			240	240	295
1 Electrical connection	6 Liquid supply connections				
2 Cold water	7 Control panel				
3 Hot water	8 Soap box				
4 Steam connection	9 Door opening ø 310 mm (W465H, W475H), ø 365 mm (W4105H)				
5 Drain					

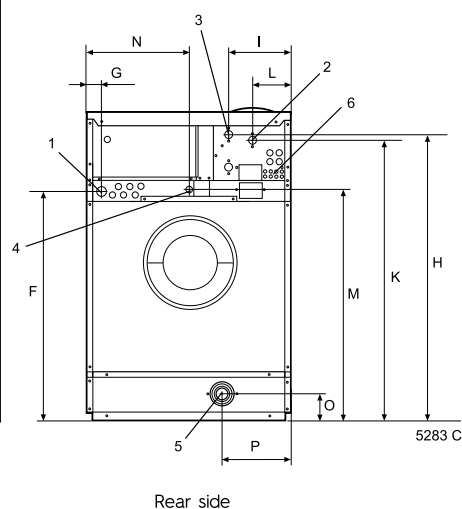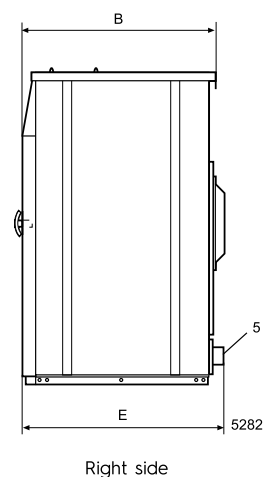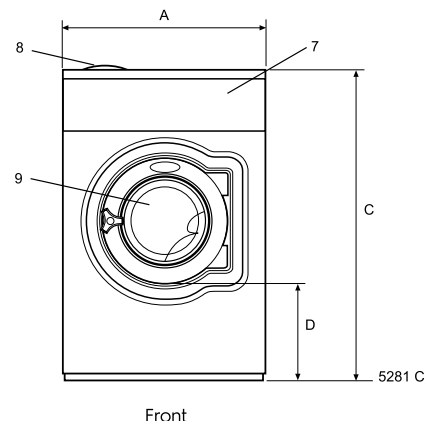

Front and side panels in light grey with "Blue Wave" on front panel (RAL 260 70 05, 250 60 30)

Other voltages available, see installation manual

Approx. value at operators position in a mid-size laundry room

Art. No. 438919520EN/2015.01.14

We reserve the right to alter specifications without notice.



Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au