



Washer extractor W5280X

Features and benefits

- **Compass Pro® microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Quick selection and option buttons for the most frequently used wash programs and options
 - Wash program packages optimized on Economy, Performance and Time. (Available on general programs)
- **AS – Automatic Savings:**
 - The machine weighs the linen and adjusts the amount of water and energy according to the load. This leads to considerable savings in case the machine is not fully loaded. (Available on general programs)
- Extremely low water and energy consumption – see table below
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- **Power Balance:**
 - Maximises the extraction force, leading to highest dewatering and savings in drying
 - Minimizes the stress on the machine, leading to trouble-free operation and increased machine lifetime
 - Reduces vibrations, making it possible to install the machine in all locations



Images shown are a representation of the product only and variations may occur.

Main options

- Stainless steel side panels
- Coin-meter

Main specifications			W5280X	
Max. capacity filling factor 1:10	kg/lb		28/62	
Drum, volume	litre		280	
diameter	ø mm		830	
Extraction	rpm		805	
G-factor			300	
Heating alternatives, 230/400V	steam		x	
	non-heated		x	
Consumption data "Normal 60°C"				
Economy			Full load, 28 kg	Half load, 14 kg
Total time	min		49	46
Water consumption (cold+hot)	litre		187+46	89+25
Energy consumption (motor/heating/hot water)	kWh		0.35/4.3	0.35/2.3
Steam consumption	kg		6.5	3.5
Residual moisture	%		54	60
Water temperature 15°C cold water and 65°C hot water. Programs with AS.				


Electrical connections

Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Steam or Non heated	220-240V 1 ~	50/60	-	1.5	16
	208-240V 1 ~	60	-	1.5	16




Water and steam connection		W5280X
Water valves	DN	20
Water pressure	kPa	200-600
Capacity at 300 kPa	l/min	60
Drain valve	ø mm	75
Steam valve	DN	15
Steam pressure	kPa	300-600
Floor requirements		
Frequency of the dynamic force	Hz	13.4
Floor load at max extraction	kN	4.9 ± 9.5
Sound levels		
Sound power level (IEC 60704-2-4)		
wash	dB(A)	69
extraction	dB(A)	75
Heat emission		
% of installed power, max		5
Shipping data		
Weight	net, kg	380
Shipping volume	m ³	2
Dimensions in mm		
A Width		933
B(a) Depth		1632
B(b) Depth		985
C Height		1456
D		590
E		520
F		1159
G		123
H		417
I		355
J		317
K		59
L		401
M		1328
N		1255
O		119
P		175
1 Operating panel	6 Drain valve	
2 Door opening ø 410 mm	7 Liquid detergent supply	
3 Detergent box	8 Electrical connection	
4 Cold water	9 Steam connection	
5 Hot water		


Other voltages available, see installation manual
Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.
Art. No. 438919531EN/2015.08.31
We reserve the right to alter specifications without notice.

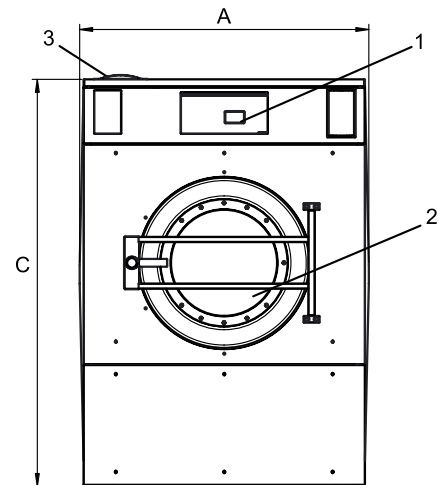

Front

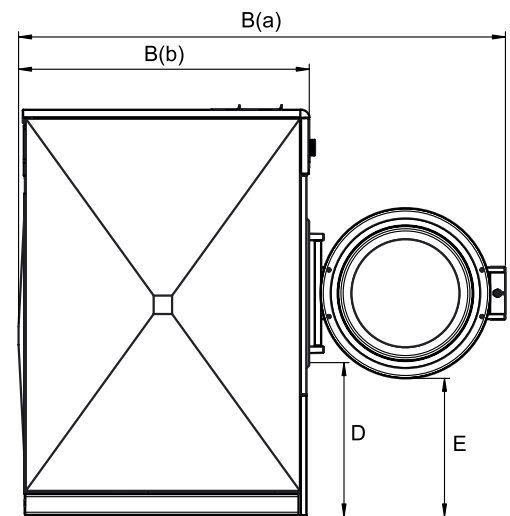

Side view

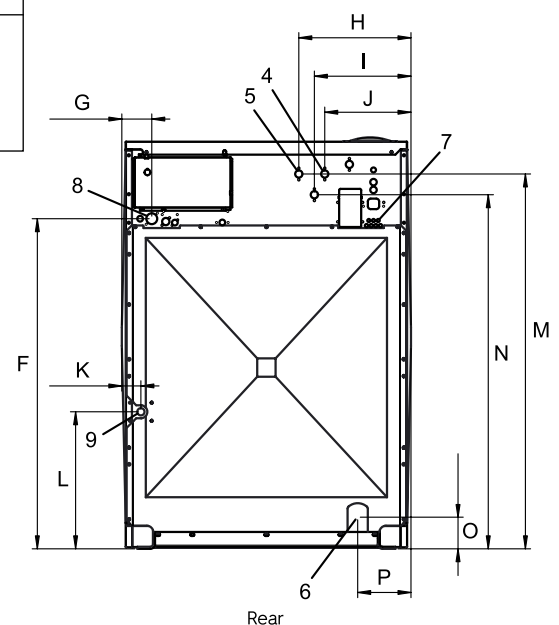

Rear



Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au