



# Washer extractor W5600X

## Features and benefits

- **Compass Pro® microprocessor offers:**
  - Large display and one control knob for easy program selection
  - Language selection
  - Quick selection and option buttons for the most frequently used wash programs and options
  - Wash program packages optimized on Economy, Performance and Time. (Available on general programs)
- Extremely low water and energy consumption – see table below
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance guarantees the correct extraction force

## Main options

- Stainless steel side panels
- Coin-meter
- Five compartment supply injector
- Third water inlet valve




Images shown are a representation of the product only and variations may occur.

Main specifications				W5600X	
Max. capacity	filling factor 1:10	kg/lb		60/135	
Drum,	volume	litre		600	
	diameter	ø mm		980	
Extraction		rpm		630	
G-factor				220	
Heating alternatives, 230/400V	electricity	kW		35	
	steam			x	
	non-heated			x	
<b>Consumption data "Normal 60°C"</b>					
<b>Economy</b>					
Total time		min		51	49
Water consumption (cold+hot)		litre		380+100	360+80
Energy consumption (motor/heating/hot water)		kWh		0.75/2.85/6.4	0.7/2.3/5.1
Steam consumption		kg		13.9	11.1
Residual moisture		%		60	66
Water temperature 15°C cold water and 65°C hot water. Depending on steam pressure.					

Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-230V 3 ~	50/60	35-38	36-40	100
	240V 3 ~	50/60	38	40	100
	380-400V 3 ~	50/60	35-38	37-40	63
	415V 3 ~	50/60	38	40	63
Non heated or steam heated	208-240V 3 ~	60	-	2.6	10

Water and steam connection			W5600X
Water valves	DN		25
Water pressure	kPa		200-600
Capacity at 300 kPa	l/min		110
Drain valve	Ø mm		75
Draining capacity	l/min		170
Steam valve	DN		20
Steam pressure	kPa		300-600
Floor requirements			
Frequency of the dynamic force	Hz		10.5
Floor load at max extraction	kN		10 ± 15.6
Sound levels			
Sound power level (IEC 60704-2-4)			
wash	dB(A)		70
extraction	dB(A)		84
Heat emission			
% of installed power, max			5
Shipping data			
Weight	net, kg		775
Shipping volume	m <sup>3</sup>		3.2
Dimensions in mm			
A	Width		1173
B(a)	Depth		1951
B(b)	Depth		1193
C	Height		1673
D			33
E			93
F			600
G			540
H			1370
I			125
J			255
K			227
L			87
M			85
N			802
O			103
P			1544
Q			1361
R			587
1	Operating panel	6	Drain
2	Door opening Ø 535 mm	7	Liquid detergent supply
3	Detergent box	8	Electrical connection
4	Cold water	9	Steam connection
5	Hot water	10	Detergent supply injector, powder, right or left side (option)

Other voltages available, see installation manual  
Average data. Crated weight/shipping volume depends on configuration.  
Please contact logistics for exact measures.  
Art No. 438919533EN/2015.05.21  
We reserve the right to alter specifications without notice.

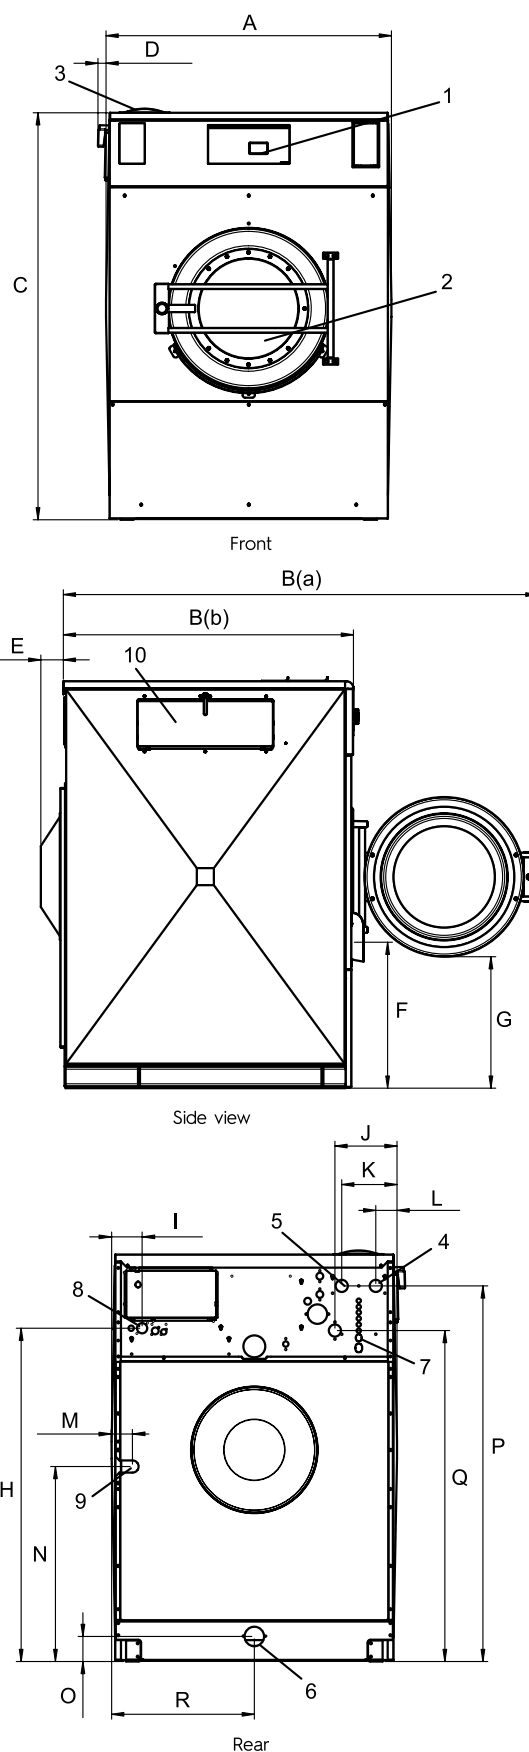

**Electrolux**  
**Authorized**  
**Partner**



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164  
Ph : (08) 9414 9474 Fax : (08) 6210 5961  
Service : 0411 883 346 / 0400 246 352  
Sales : 0406 659 429/ [sales@comls.com.au](mailto:sales@comls.com.au)  
Web site : [www.comls.com.au](http://www.comls.com.au)