



# Industrial Ironers

## IB42310, IB42314, IB42316



Images shown are a representation of the product only and variations may occur.

### Features and benefits

- Return feed system
- Finger guard protection provides additional safety for operator
- Adjustable temperature
- Cylinder covered with steel wool and cotton felt for a long life time and a good drive of the linen
- Ergonomic control pedal
- Feeding table and reception tray made of steel

### Main options

- Coin meter operation
- Variable speed control
- Cylinder Nomex<sup>®</sup> padding which can withstand temperatures above 200°C

| Main specifications                                                   |       | IB42310 | IB42314 | IB42316 |
|-----------------------------------------------------------------------|-------|---------|---------|---------|
| Capacity , max. water evaporation                                     | l/h   | 5       | 6.8     | 8.1     |
| Roller,                                                               |       |         |         |         |
| diameter                                                              | ø mm  | 230     | 230     | 230     |
| length                                                                | mm    | 1000    | 1400    | 1650    |
| Ironing speed                                                         | m/min | 3.4     | 3.4     | 3.4     |
| Heating, electricity                                                  | kW    | 5.0     | 7.2     | 8.4     |
| 20% residual moisture content and 100% roller utilization (ISO 9398). |       |         |         |         |


| Electrical connections  |                | IB42310         | IB42314  | IB42316  |
|-------------------------|----------------|-----------------|----------|----------|
| Voltage                 |                |                 |          |          |
| 230-240V 3 AC 50/60 Hz  | kW (A)         | 5.2 (16)        | 7.5 (20) | -        |
| 230V 1 AC 50/60 Hz      | kW (A)         | 5.2 (32)        | 7.5 (32) | -        |
| 400-415V 3N AC 50 Hz    | kW (A)         | 5.2 (10)        | 7.5 (16) | 8.7 (16) |
| 400-440V 3 AC 50/60 Hz  | kW (A)         | 5.2 (10)        | 7.5 (16) | 8.7 (16) |
| Connections             |                |                 |          |          |
| Exhaust, outlet         | ø mm           | -               | 40       | 40       |
| Sound levels            |                |                 |          |          |
| Airborne sound level    | dB(A)          | 52              | 54       | 54       |
| Heat emission           |                |                 |          |          |
| % of installed power    |                | 3               | 3        | 3        |
| Shipping data           |                |                 |          |          |
|                         | net, kg        | 120             | 140      | 184      |
| Shipping volume         | m <sup>3</sup> | 0.91            | 1.16     | 1.34     |
| Dimensions in mm        |                |                 |          |          |
| A Width                 |                | 1395            | 1795     | 2045     |
| B Depth                 |                | 510             | 510      | 510      |
| C Height                |                | 1025            | 1025     | 1025     |
| D                       |                | 1055            | 1455     | 1705     |
| E                       |                | 940             | 940      | 940      |
| F                       |                | 420             | 420      | 420      |
| 1 Electrical connection |                | 3 Control panel |          |          |
| 2 Bed release lever     |                | 4 Control pedal |          |          |

Other voltages available, see installation manual.


Average data. Crated weight/shipping volume depends on configuration.  
Please contact logistics for exact measures.



# Electrolux

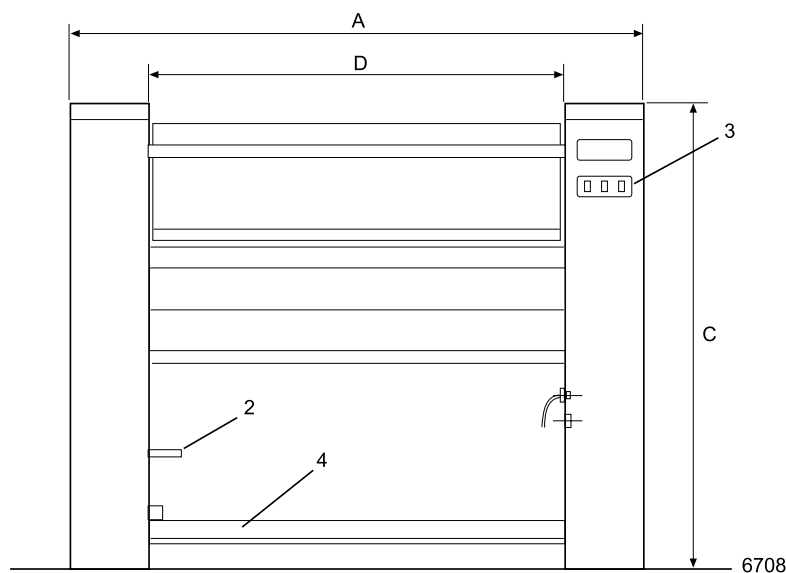

Front view

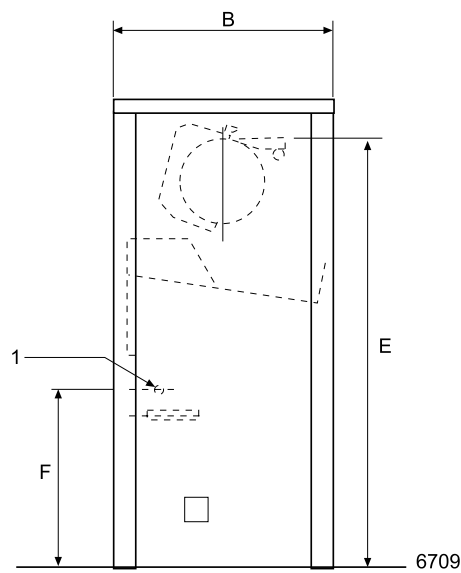

Left side view

Art No. 43890328/20150114

We reserve the right to alter specifications without notice.



**Electrolux**  
**Authorized**  
**Partner**



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164  
Ph : (08) 9414 9474 Fax : (08) 6210 5961  
Service : 0411 883 346 / 0400 246 352  
Sales : 0406 659 429/ [sales@comls.com.au](mailto:sales@comls.com.au)  
Web site : [www.comls.com.au](http://www.comls.com.au)