



Tumble dryer T5290

Features and benefits

- Axial airflow and tight construction gives low energy consumption
- High productivity - 2 full loads per hour
- Large door opening for easy loading and unloading
- Easy and ergonomic access to the lint screen
- Excellent water evaporation efficiency per kWh
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption
- With Compass Pro program control
 - Large and clear display with control knob for easy program selection
 - Easy access with user-friendly interface
 - Language selection
 - Drying program packages optimized for Economy, Care and Time
 - Service program for adjustment of parameters
 - USB connection

Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control - RMC
- Connection to booking- /payment- system or coin meter
- Reversing drum
- Emergency stop button
- Supply disconnecter

Accessories

- Fresh air intake
- Exhaust on top
- Insert for drying special equipment



Images shown are a representation of the product only and variations may occur.


Main specifications			T5290			
Rated capacity,	filling factor 1:18	kg/lb	16.1/35.5			
	filling factor 1:22	kg/lb	13.2/29.1			
Drum volume		litre	290			
Drum diameter		mm	680			
Heating alternatives	electric	kW	13.5/18			
	gas	BTU/h (kW)	71 700 (21)			
	steam at 600-700 kPa	kW	23			
Consumption data			13.5 kW	18 kW	Gas	Steam
Total time at 13.2 kg	min		27	22	20	19
Energy consumption at 13.2 kg	kWh		6.33	6.37	7.01	9.04
Evaporation	g/min		244	303	328	348
Energy kWh/litre water evaporated	kWh/l		0.96	0.97	1.06	1.37

At rated capacity 100% cotton load at 50% initial moisture dried to 0%.


Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-230V 1 ~	50/60	13.5/18.0	14.2/18.7	63/100
	240V 1 ~	50/60	13.5/18.0	14.2/18.7	63/80
	220-240V 3 ~	50/60	13.5/18.0	14.5/19.0	50
	380-415V 3 ~	50/60	13.5/18.0	14.5/19.0	25/35
Gas heated/	220-240V 1 ~	50/60	-	0.7	10
Steam heated	220-240V 3 ~	50/60	-	1.0	10
	380-415V 3 ~	50/60	-	1.0	10

Steam, gas and air connections			T5290
Steam	ISO 7/1-R		1"
Steam pressure		kPa	100-1000
Steam consumption		kg/h	65
Condensate	ISO 7/1-R		1"
Gas	NG/PG	ISO 7/1-R	1/2"
Gas pressure	Natural gas	Pa	2000
		mbar	20
	Propane	Pa	2800-3700
		mbar	28-37
Air outlet		ø mm	200
Maximum air flow:			
Electric 50 Hz / 60 Hz		m³/h	550 / 550
Gas 50 Hz / 60 Hz		m³/h	610 / 610
Steam 50 Hz / 60 Hz		m³/h	690 / 690
Maximum static back pressure:			
Electric 50 Hz / 60 Hz		Pa	400 / 700
Gas 50 Hz / 60 Hz		Pa	400 / 700
Steam 50 Hz / 60 Hz		Pa	600 / 1100
Sound levels			
Airborne sound level		dB(A)	<70
Heat emission			
% of installed power, max			15
Shipping data			
Shipping volume	net, kg		189
	crated, m³		1.74
Dimensions in mm			
A	Width		713
B(a)	Depth		1210
B(b)	Depth		1358
C	Height		1688
D			741
E			790
F			53
G			70
H			367
I			295
J			166
K			142
L			357
M			605
N			694
O			673
1 Control panel 2 Door opening ø 580 mm 3 Electrical connection 4 Gas connection 5 Exhaust connection 6 Condensate connection 7 Steam connection 8 Lint screen			


Other voltages available, see installation manual.
Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.
Art No. 438913761/2015.0114
We reserve the right to alter specifications without notice.

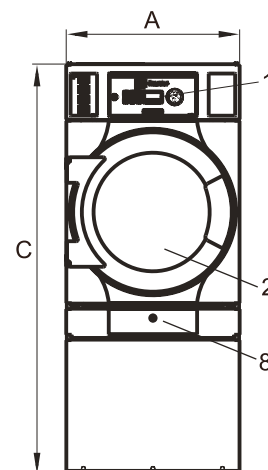

Front

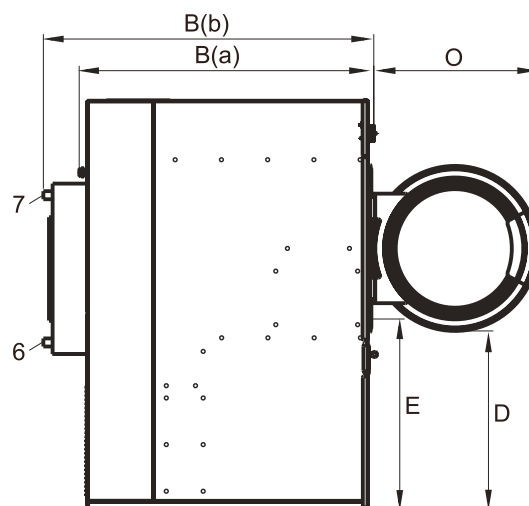

Left side

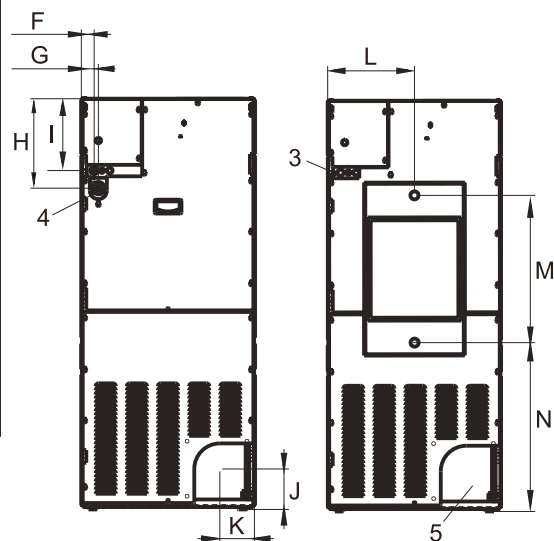

EL gas

Steam

Rear side



Electrolux
Authorized
Partner



Unit 3 / 41 Biscayne Way, Jandakot, WA 6164
Ph : (08) 9414 9474 Fax : (08) 6210 5961
Service : 0411 883 346 / 0400 246 352
Sales : 0406 659 429/ sales@comls.com.au
Web site : www.comls.com.au